

FY Series Plastic Head Pneumatic Flange Angle Seat Valve



-20°C ~ +180°C

-20°C ~ +60°C

1.6MPa

0.3~0.8MPa


DN15-DN125

CF8/CF8M

PTFE

304/316L

NBR

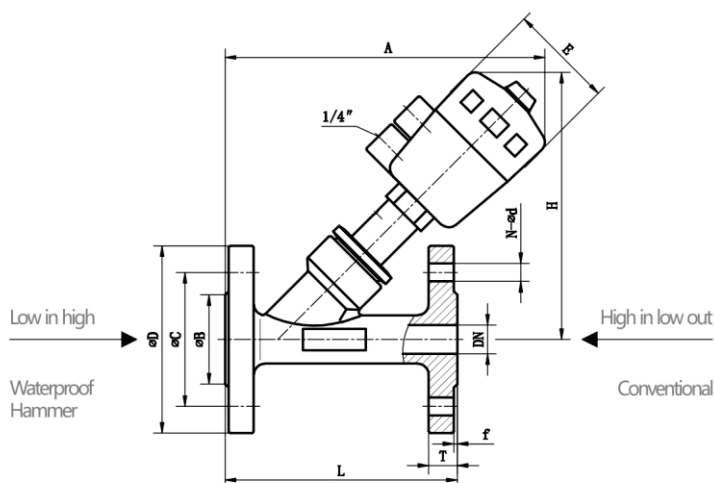

Technical parameters

Medium temperature: - 20 °C ~ + 180 °C

Ambient temperature: - 20 °C ~ + 60 °C

Nominal pressure: 1.6 MPa

Control gas, gas, air

Air pressure: 0.3 ~ 0.8 MPa

Specification: DN15-DN125

The valve body material: CF8/CF8M

seat material:PTFE

Stem material: 304/316L

Sealing ring material: NBR

HG5010-58/PN10/PN16,

PN25,GB/T9113,HG20593,ISO,DIN,JIS

Flange standard: HG5010-58 / PN10 / PN16, Can be customized according to user PN25, GB/T9113, HG20593, ISO, DIN, JIS and other standards.

model	L	T	f	D	C	B	A	H	E	N-Φd	Actuator	Waterproof hammer
DN15	130	14	2	95	65	40	185	160	64	4-Φ14	Φ50	Φ50
DN20	130	14	2	105	75	50	185	160	64	4-Φ14	Φ50	Φ50
DN25	140	14	2	115	85	60	200/230	170/205	64/80	4-Φ14	Φ50/Φ63	Φ63
DN32	150	16	2	135	100	70	240	210	80	4-Φ18	Φ63	Φ80
DN40	180	16	2	145	110	80	250	215	80	4-Φ18	Φ63	Φ80
DN50	195	16	2	160	125	92	260/280	220/230	80/100	4-Φ18	Φ63/Φ80	Φ100
DN65	230	18	2	185	145	115	300	270	100	4-Φ18	Φ80	Φ100
DN80	250	18	2	195	160	130	360	310	126	8-Φ18	Φ100	Φ125
DN100	300	18	2	215	180	150	380	330	126	8-Φ18	Φ100	Φ125