


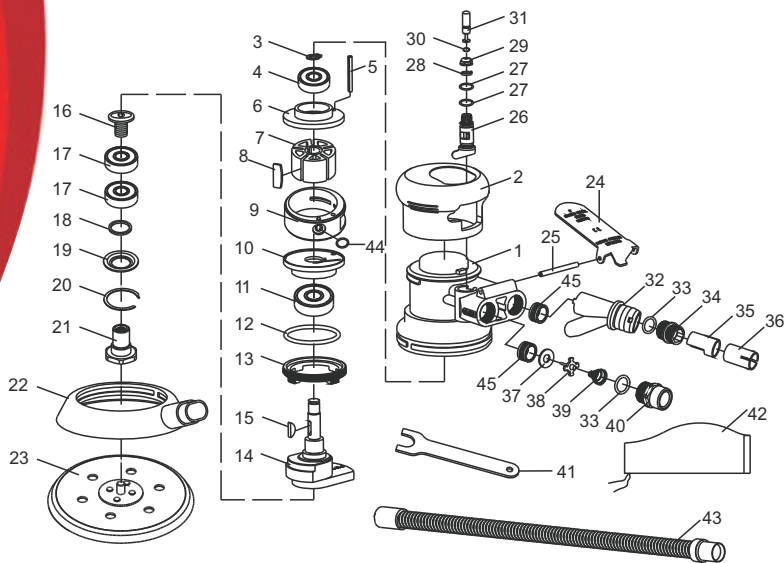

Features

- Light Weight And Ergonomic Design
- One - Piece Speed Control Lever Hardened Steel Alloy Cylinder.
- Down Position Speed Control Knob
- Perfectly Balanced Sanding Pad
- Low Sound And Less Vibration
- 3/32" Diameter Orbit Mode And Random Circular Pattern Provide A Higher Degree Og Finish On Wood, Metal And Composites
- Dust Tube And Dust Collecting Bag Included
- Rear Exhaust

Specifications

Part No.	Description	Qty.
1	Main housing	1
2	Head cover	1
3	Washer	1
4	Bearing	1
5	Bolt	1
6	Rear plate	1
7	Rotor	1
8	Rotor blade	5
9	Cylinder	1
10	Front plate	1
11	Bearing	1
12	O-ring	1
13	Fixing ring	1
14	Rotating axle	1
15	Semi-round key	1
16	Screw	1
17	Bearing	2
18	Wool ring	1
19	Washer	1
20	E-clip	1
21	Bearing stand	1
22	Dust cover	1
23	Sanding pad	1

Part No.	Description	Qty.
24	Trigger	1
25	Trigger bolt	1
26	Trigger valve	1
27	O-ring	2
28	Cushion	1
29	Nut	1
30	O-ring	1
31	Lever	1
32	Dust tube connector	1
33	O-ring	2
34	Muffler	1
35	Dust connector accessory(1)	1
36	Dust connector accessory(2)	1
37	Lubricating ring	1
38	Tilting valve	1
39	Spring	1
40	Air inlet	1
41	Wrench	1
42	Dust collecting bag	1
43	Dust tube	1
44	O-ring	1
45	Housing insert	2

MODEL	:	991LA	AVG. AIR CONSUMPTION	:	4 CFM
SANDING PAD	:	152MM	WORKING PRESSURE	:	6.3 BAR
FREE SPEED	:	10000 RPM	LENGTH×HEIGHT	:	225×143 MM
AIR INLET	:	1/4"	WEIGHT	:	0.95 KGS
AIR HOSE (ID)	:	3/8"			