


Features

- Air Screw driver
- Heavy Duty
- Twin Hammer

Exploded View

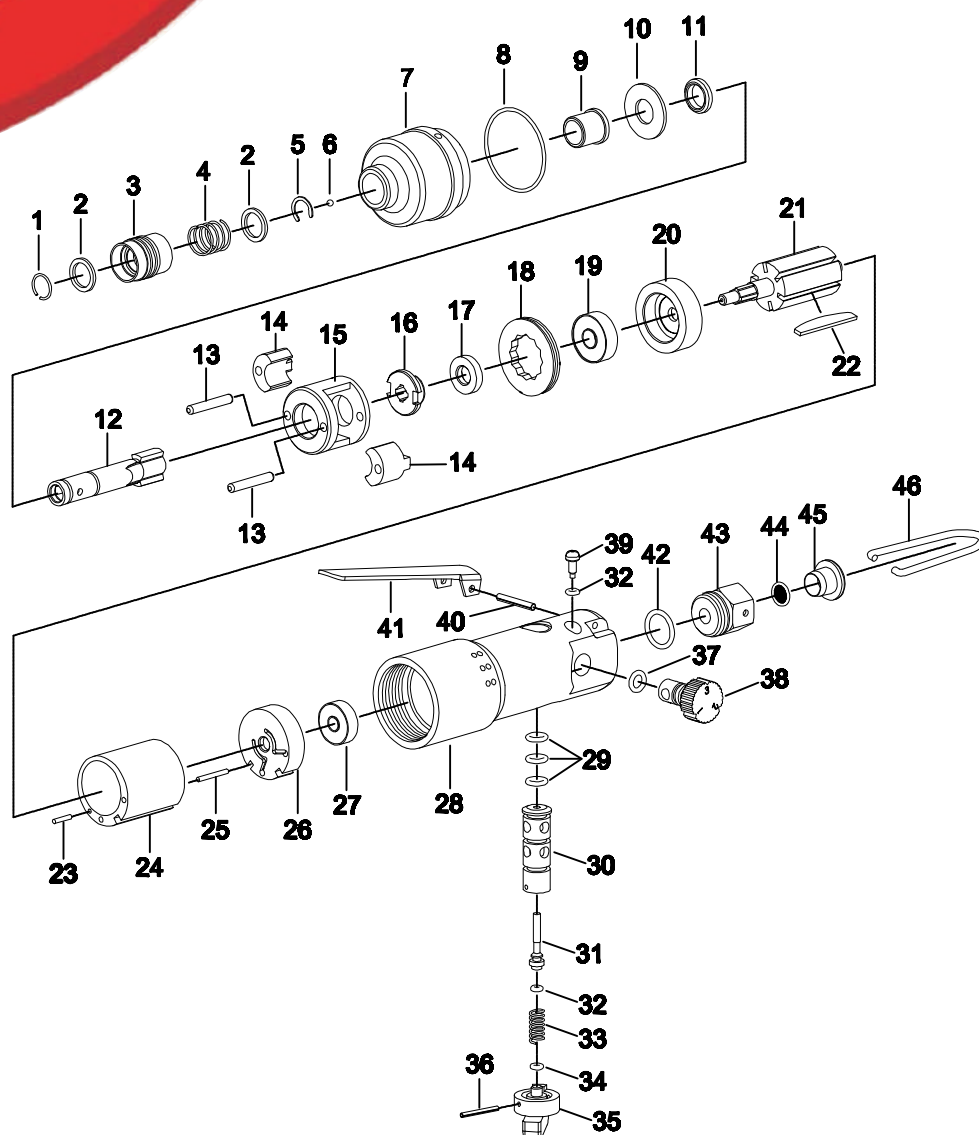

SPECIFICATION

Max. Torque: 45Nm

Bolt Capacity: 4-6 mm

Free Speed: 1200 rpm

Weight: 0.78 kg

Length: 195 mm

NO.	DESCRIPTION	Q' TY	NO.	DESCRIPTION	Q' TY
1	Check Ring	1	25	Pin(Φ2x20)	1
2	Lock Washer	2	26	Rear End Plate	1
3	Lock Sleeve	1	27	Bearing(626)	1
4	Spring	1	28	Housing	1
5	Retaining Ring	1	29	O-Ring(Φ9.2x1.9)	3
6	Steel Ball (Φ3.0)	1	30	Valve Bushing	1
7	Hammer Case	1	31	Valve Stem	1
8	O-Ring(Φ27x1.5)	1	32	O-Ring(Φ2.2x2)	2
9	Bushing	1	33	Spring	1
10	Washer	1	34	O-Ring(Φ4x2.3)	1
11	Adjusting Ring	1	35	Reverse Knob	1
12	Anvil	1	36	Spring Pin(Φ2x20)	1
13	Hammer Pin	2	37	O-Ring(Φ5.6x2.2)	1
14	Hammer Dog	2	38	Regulator	1
15	Hammer Gage	1	39	Screw(M4X8)	1
16	Hammer Cam	1	40	Spring Pin(Φ3x24)	1
17	Washer	1	41	Trigger	1
18	Nut	1	42	O-Ring(Φ10.5x1.8)	1
19	Bearing(608)	1	43	Inlet Adapter	1
20	Front End Plate	1	44	Air Strainer	1
21	Rotor	1	45	Plug	1
22	Rotor Blade	6	46	Hanger	1
23	Pin(Φ2x10)	1			
24	Cylinder	1			

◆The types and specifications may be changed without notice.

◆Please place the order for components with part number.