


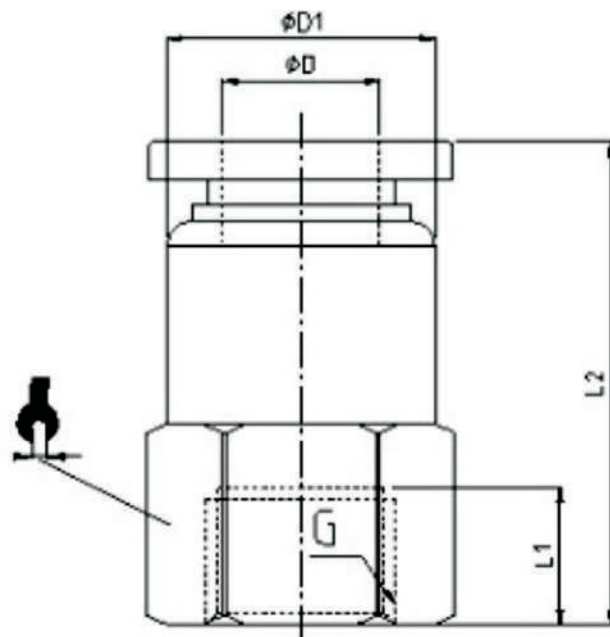

Features

- One-touch tube fittings are used in pneumatic piping.
- The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- Even after installation, the direction of the tube can be changed freely.
- Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- All R and NPT threads are pre-coated sealant.

MODEL	ØD	G	L1	L2	ØD1	⌀
GPCF04-G01	4	G1/8	8.5	24	10	14
GPCF04-G02	4	G1/4	11	26.5	10	17
GPCF04-G03	4	G3/8	12	28	10	21
GPCF06-G01	6	G1/8	8.5	24.5	12	14
GPCF06-G02	6	G1/4	11	27	12	17
GPCF06-G03	6	G3/8	12	28	12	21
GPCF06-G04	6	G1/2	14	30	12	24
GPCF08-G01	8	G1/8	8.5	26	14	14
GPCF08-G02	8	G1/4	11	28.5	14	17
GPCF08-G03	8	G3/8	12	29.5	14	21
GPCF08-G04	8	G1/2	14	31.5	14	24
GPCF10-G01	10	G1/8	8.5	29.5	17	17
GPCF10-G02	10	G1/4	11	32.7	17	17
GPCF10-G03	10	G3/8	12	33	17	21
GPCF10-G04	10	G1/2	14	35.7	17	24
GPCF12-G01	12	G1/8	8.5	31	20	21
GPCF12-G02	12	G1/4	11	33.5	20	21
GPCF12-G03	12	G3/8	12	34.5	20	21
GPCF12-G04	12	G1/2	14	36.5	20	24

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.8Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg (10 Torr)
Working Temperature	32~140°F	0~60°C