


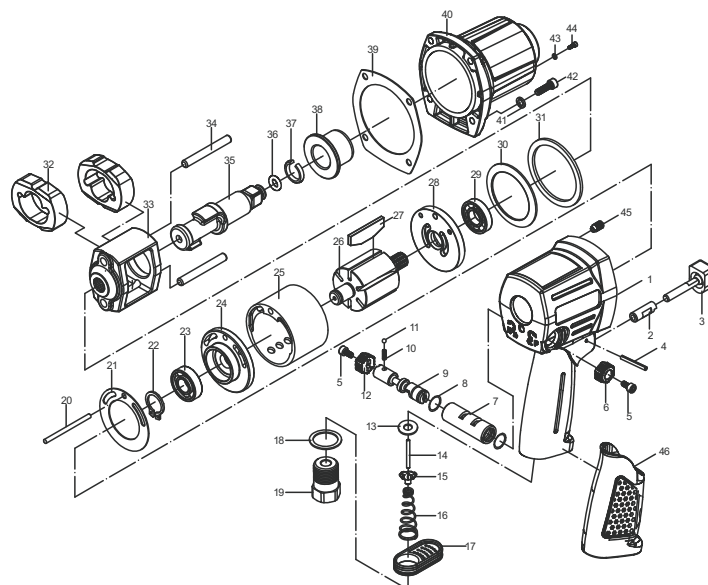

Features

- Durable Twin Hammer Impact Mechanism
- Adjustable 3-position Power Switch In Forward And Reverse
- Easy-to-service Two-piece Construction
- Great For Installing/tightening Or Remove Loosening Threaded Fasteners And For Other Work Shop Applications
- Handle Exhaust

Part No.	Description	Qty.	Part No.	Description	Qty.
1	Main housing	1	24	Rear plate	1
2	Trigger sleeve	1	25	Cylinder	1
3	Trigger	1	26	Rotor	1
4	Trigger bolt	1	27	Rotor blade	6
5	Screw	2	28	Front plate	1
6	F/R valve knob	1	29	Bearing	1
7	Valve bushing	1	30	Washer	1
8	O-ring	2	31	Washer	1
9	Valve	1	32	Hammer	2
10	Spring	1	33	Hammer cage	1
11	Steel ball	1	34	Hammer pin	2
12	F/R valve knob	1	35	Anvil	1
13	Valve seat	1	36	O-ring	1
14	Pin	1	37	Retainer O-ring	1
15	Pin sleeve	1	38	Anvil bushing	1
16	Valve spring	1	39	Gasket	1
17	Exhaust deflector	1	40	Protector cover	1
18	Washer	1	41	Spacer	4
19	Air inlet	1	42	Cap screw	4
20	Dowel pin	1	43	O-ring	1
21	Gasket	1	44	Screw	1
22	Retainer ring	1	45	Thread sleeve	4
23	Rear rotor bearing	1	46	Soft grip	1

Specifications

MODEL	:	PAT-103	AIR HOSE	:	3/8"
SQUARE DRIVE	:	3/8"	AVG AIR CONSUMPTION	:	5.5CFM
FREE SPEED	:	9000RPM	WORKING PRESSURE	:	6.3 BAR
MAX TORQUE	:	340NM	LENGTH × HEIGHT	:	189×160MM
AIR INLET	:	1/4"	WEIGHT	:	1.50KGS