


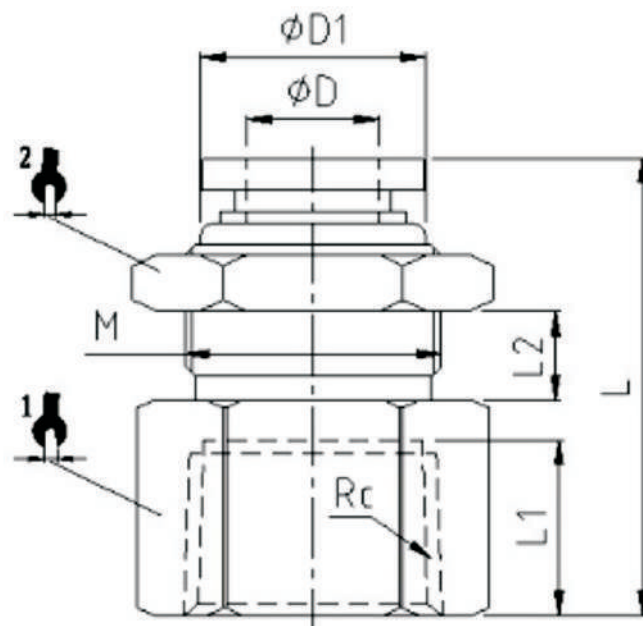

Features

- One-touch tube fittings are used in pneumatic piping.
- The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- Even after installation, the direction of the tube can be changed freely.
- Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- All R and NPT threads are pre-coated sealant.

MODEL	ØD	Rc	L	L1	L2	ØD1	↺	↻	M
PMF04-01	4	Rc1/8	24	8.5	6	10	14	14	M12X1
PMF04-02	4	Rc1/4	26.5	11	6	10	17	14	M12X1
PMF06-01	6	Rc1/8	24.8	8.5	7	12	17	17	M14X1
PMF06-02	6	Rc1/4	29.5	11	7	12	17	17	M14X1
PMF06-03	6	Rc3/8	30.5	12	7	12	21	17	M14X1
PMF06-04	6	Rc1/2	33	14	7	12	24	17	M14X1
PMF08-01	8	Rc1/8	26.5	8.5	7.5	14	19	19	M16X1
PMF08-02	8	Rc1/4	32	11	7.5	14	19	19	M16X1
PMF08-03	8	Rc3/8	34.3	12	7.5	14	21	19	M16X1
PMF08-04	8	Rc1/2	36.5	14	7.5	14	24	19	M16X1
PMF10-01	10	Rc1/8	30	8.5	9.5	17	24	24	M20X1
PMF10-02	10	Rc1/4	32.5	11	9.5	17	24	24	M20X1
PMF10-03	10	Rc3/8	34	12	9.5	17	24	24	M20X1
PMF10-04	10	Rc1/2	38	14	9.5	17	24	24	M20X1
PMF12-01	12	Rc1/8	31.5	8.5	10	20	24	26	M22X1
PMF12-02	12	Rc1/4	34	11	10	20	24	26	M22X1
PMF12-03	12	Rc3/8	35	12	10	20	24	26	M22X1
PMF12-04	12	Rc1/2	37	14	10	20	24	26	M22X1

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.8Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg (10 Torr)
Working Temperature	32~140°F	0~60°C