
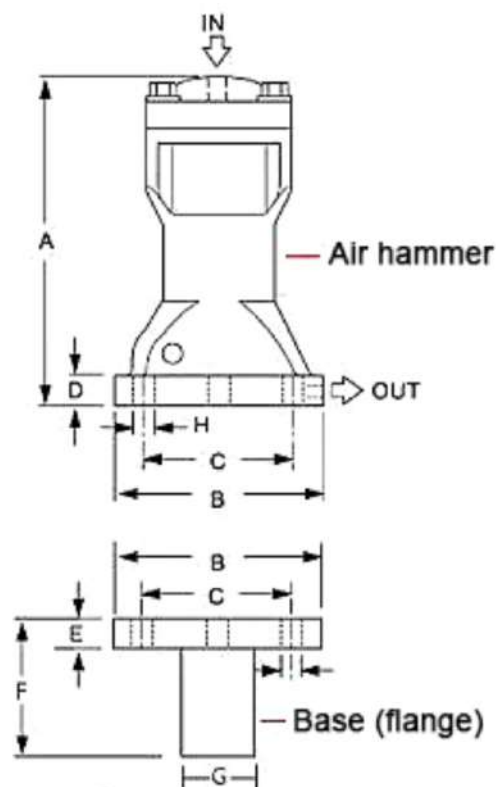




Dimensions Table (Unit =mm)

Model	Service pressure Mpa	Air consumption L/Time	Impact energy N.M	Weight Kg
SK-30	0.3~0.7	0.05~0.13	5.5~13.1	1.1Kg
SK-40	0.3~0.7	0.15~0.37	9.2~22.3	2.7Kg
SK-60	0.3~0.7	0.33~0.77	20.6~49.0	6.0Kg
SK-80	0.4~0.6	0.60~1.40	45.1~109.0	11.5Kg
SK-100	0.4~0.6	1.22~2.75	96.5~238.6	16.2Kg

Performance Parameter

Model	A	B	C	D	E	F	G	H	IN	OUT
SK-30	130	80	62 *{ 60 67 }	14	11	48	34	9	1/4"PT	1/8"PT
SK-40	158	98	70 *{ 75 77 }	20	12	67	40	11	1/4"PT	1/4"PT
SK-60	213	140	110 *{ 105 }	20	12	67	48	15	1/4"PT	1/4"PT
SK-80	275	170	140 *{ 125 }	25				17	3/8"PT	3/8"PT
SK-100	287	210	160					22	3/8"PT	1/2"PT